
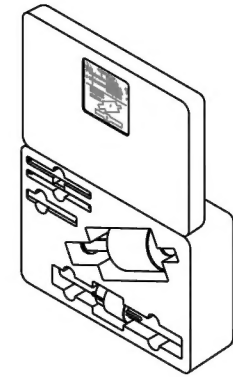


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS | | | | | |
|-----------|-----|--------------------------|-----------|---------|----------|
| REV | ECR | DESCRIPTION | DATE | INITIAL | APPROVED |
| 1 | | RELEASED FOR PRODUCTION. | 1/21/2016 | DPD | JAG |

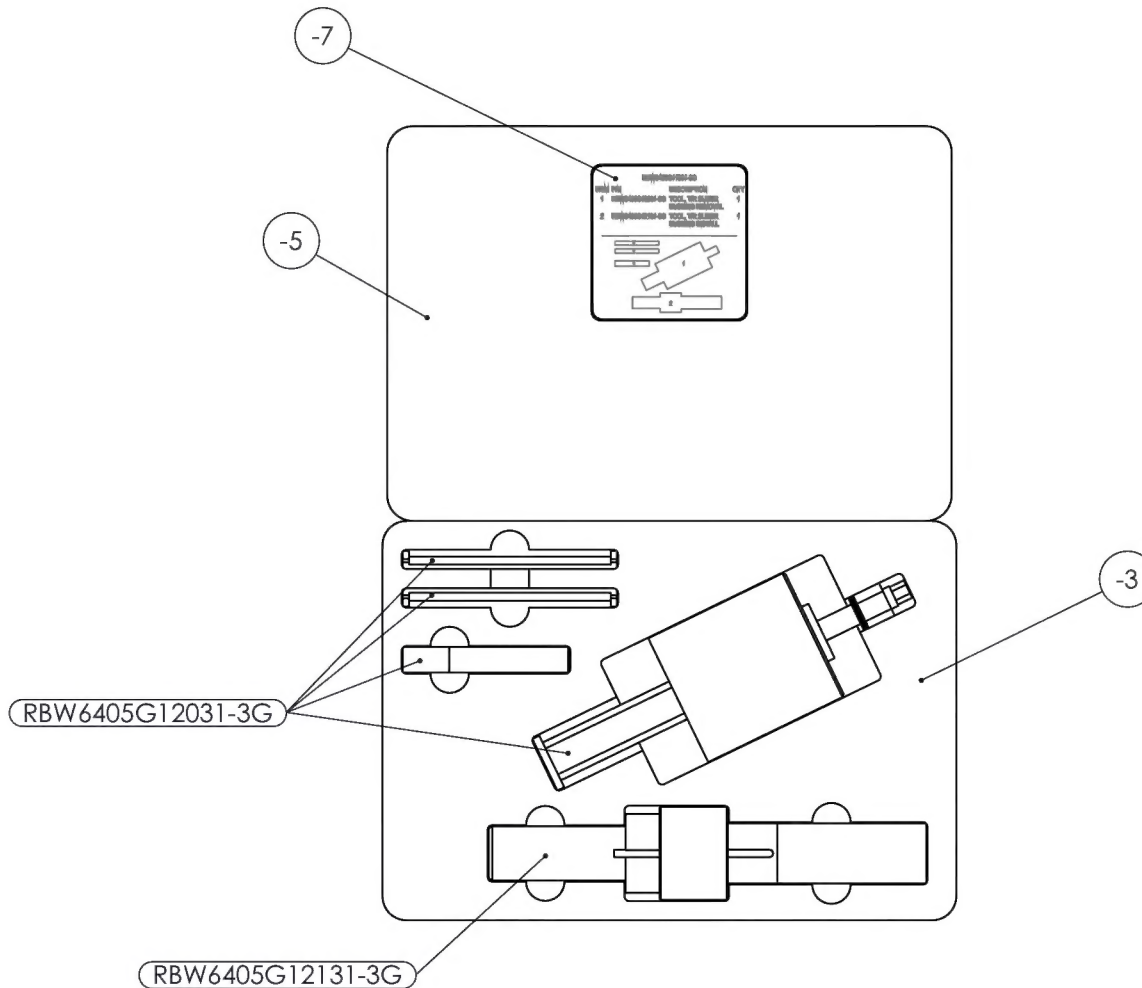



NOTE:
REF. AGUSTA T/N: 3G6405G11931.

| DART AEROSPACE | |
|--|--|
| TITLE T/R SLIDER BUSHING R&R (NEW STYLE BUSHING) | |
| DWG NO. RBW6405G11931-3G | REV 1 |
| MAT'L REPT TREAT FINISH | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125° |
| SPEC | 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R |
| DRAWN BY: CLOUGH | 2. DIMENSIONAL LIMITS APPLY AFTER PLATING |
| CHECKED: DUERFELDT | 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 |
| OPPS APPR: ANDERSON | USED ON MODEL |
| QA APPR: LINDSAY | |
| APPROVED: GILBERT | |
| SCALE 1:5 | DATE 8/24/2015 |
| SHEET 1 OF 4 | |

| ASSY QTY | ASSY QTY | B/O | Part # | UNIT QTY | Description | Material | B/O INFORMATION OR SPECIFICATIONS | PG. |
|----------|----------|-----|--------|----------|--|-----------|---------------------------------------|-----|
| | | | | 1 | TOOL, T/R SLIDER BUSHING REMOVAL (NEW STYLE BUSHING) | | RBW6405G12031-3G | 1 |
| | | | | 1 | TOOL, T/R SLIDER BUSHING INSTALL (NEW STYLE BUSHING) | | RBW6405G12131-3G | 1 |
| | | B/O | -1 | 1 | CASE | PLASTIC | PELICAN CASE #APP-1450-E | N/S |
| | | B/O | -3 | 1 | BOTTOM FOAM | Y20 BLACK | 4.29 X 10.40 X 14.94 (I.R. SPECIALTY) | 2 |
| | | B/O | -5 | 1 | LID FOAM | Y20 BLACK | 1.79 X 10.28 X 14.69 (I.R. SPECIALTY) | 3 |
| | | | -7 | 1 | PLACARD | PLASTIC | | 4 |
| | | B/O | | 1 | DART PLACARD | ALUMINUM | RB41011 | N/S |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| REV | ECR | DESCRIPTION | DATE | INITIAL |
| | | | | APPROVED |

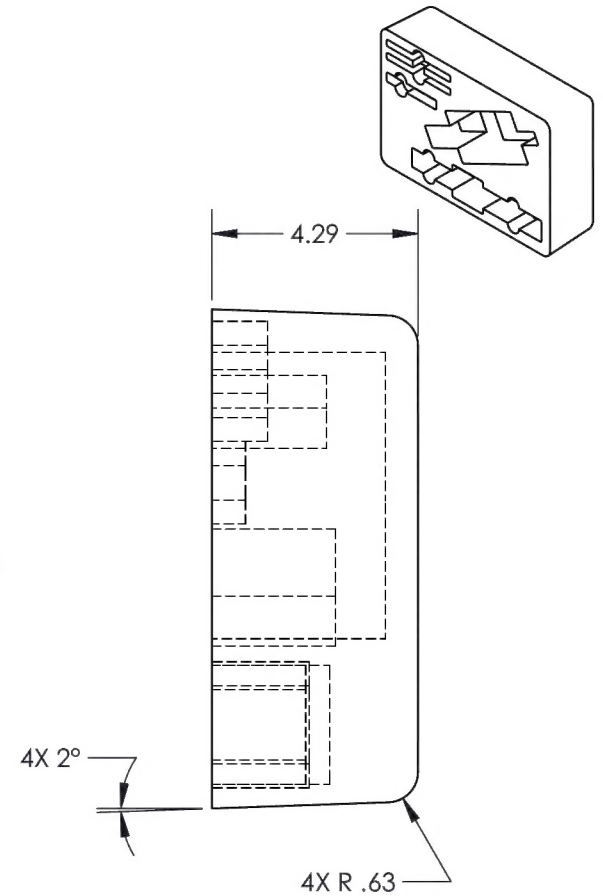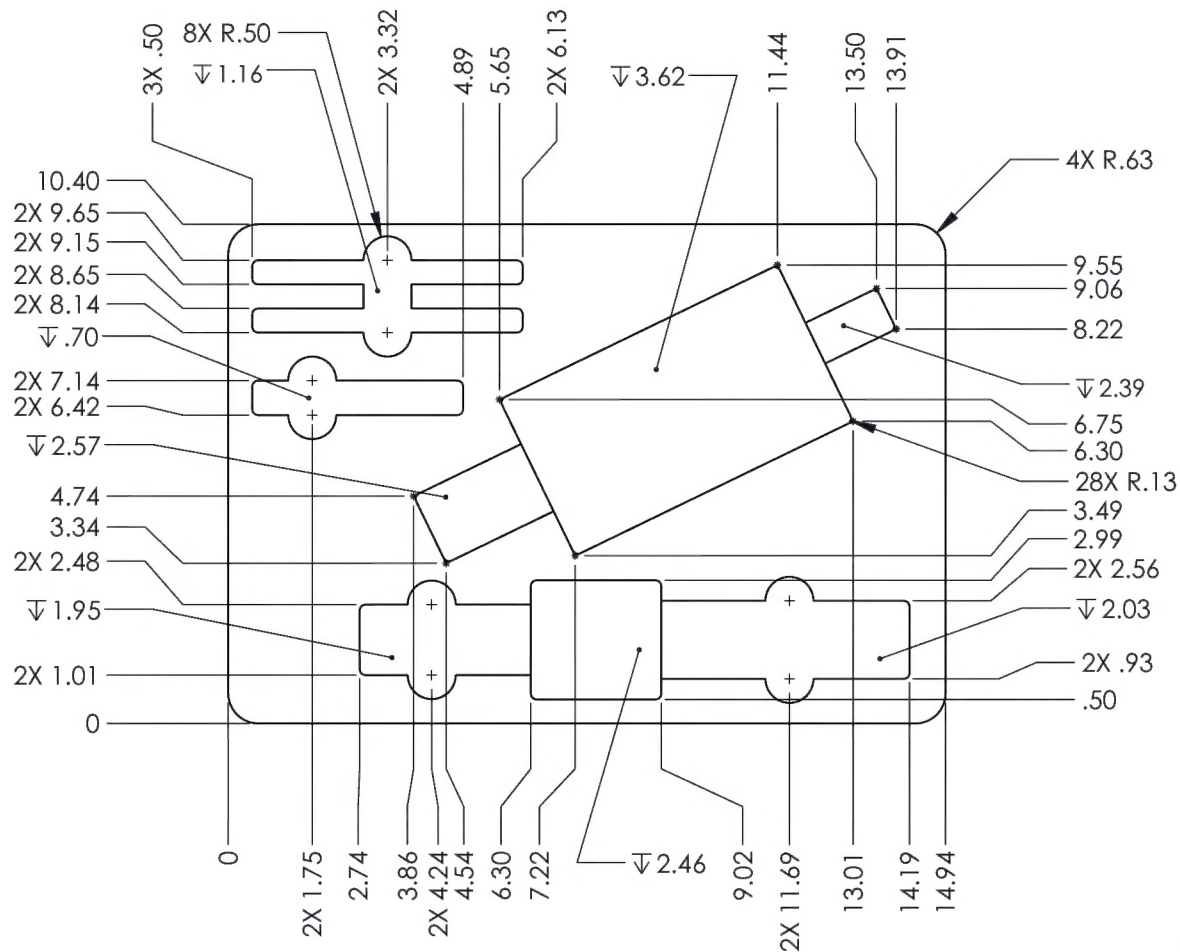




(-3)

BOTTOM FOAM

| | |
|--|----------------|
| DART AEROSPACE | |
| TITLE: T/R SLIDER BUSHING R&R (NEW STYLE BUSHING) | |
| DWG NO. RBW6405G11931-3G-3 | REV 1 |
| MAT'L Y20 BLACK | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | |
| .XXX ± .010 FRACTIONS ± 1/8 | |
| .XX ± .03 ANGLES ± 1° | |
| .X ± .1 SURFACES = 125 | |
| SPEC | |
| 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R | |
| 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | |
| 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 | |
| USED ON MODEL | |
| DRAWN BY: CLOUGH | |
| CHECKED: DUERFELDT | |
| OPPS APPR: ANDERSON | |
| QA APPR: LINDSAY | |
| APPROVED: GILBERT | |
| SCALE 1:4 | DATE 8/21/2015 |
| SHEET 2 OF 4 | |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| REV | ECR | DESCRIPTION | DATE | INITIAL |
| | | | | APPROVED |

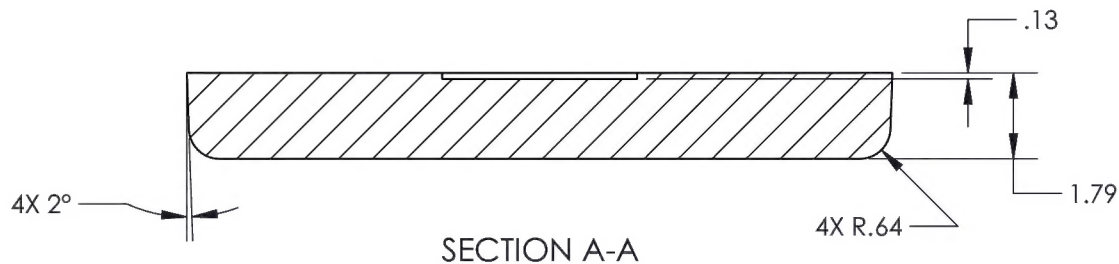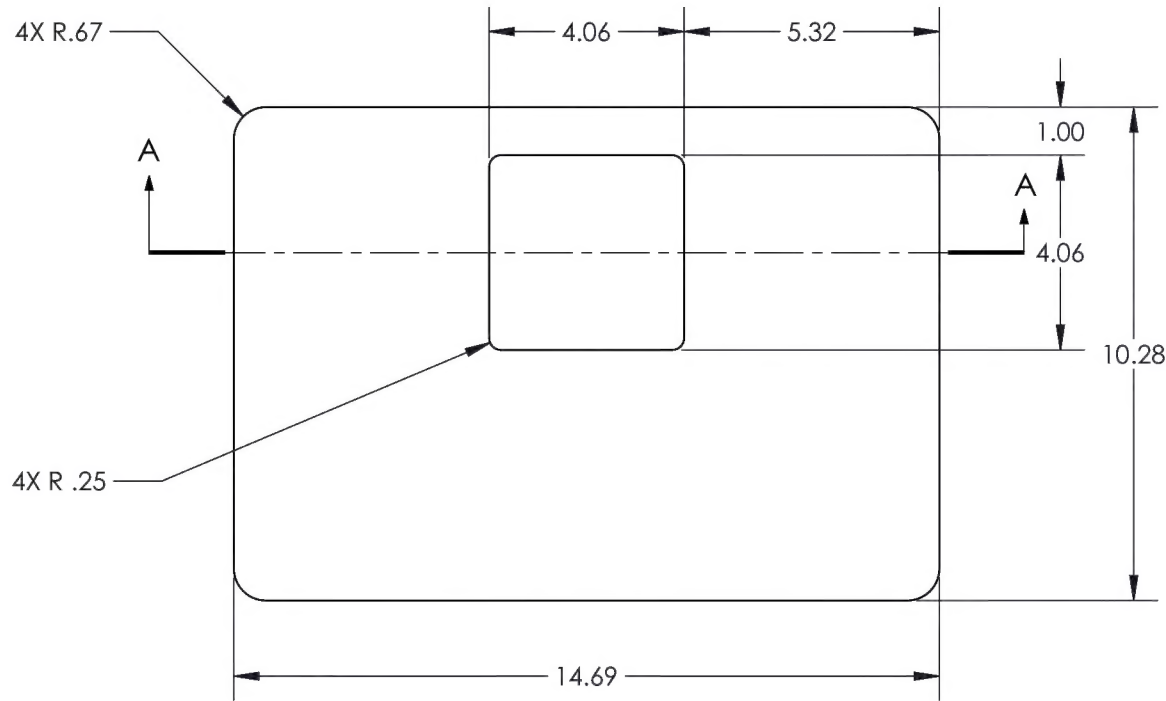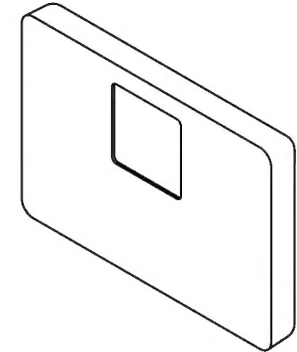


(5)
LID FOAM

| | |
|---|----------------|
| DART AEROSPACE | |
| TITLE T/R SLIDER BUSHING R&R (NEW STYLE BUSHING) | |
| DWG NO. RBW6405G11931-3G-5 | REV 1 |
| MAT'L Y20 BLACK HEAT TREAT FINISH SPEC | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .010 FRACTIONS ± 1/8 .XX ± .03 ANGLES ± 1° .X ± .1 SURFACES = 125° ✓ | |
| 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 | |
| DRAWN BY: CLOUGH CHECKED: DUERFELDT OPPTS APPR: ANDERSON QA APPR: LINDSAY APPROVED: GILBERT | |
| USED ON MODEL | |
| SCALE 1:4 | DATE 8/24/2015 |
| SHEET 3 OF 4 | |

| REVISIONS | | | | | |
|-----------|-----|-------------|------|---------|----------|
| REV | ECR | DESCRIPTION | DATE | INITIAL | APPROVED |



A vertical line is shown. A horizontal arrow points from the left towards the line, with the label ".06" next to it.

| | | | |
|---|----------------|--|-------|
|  | | | |
| TITLE T/R SLIDER BUSHING R&R (NEW STYLE BUSHING) | | | |
| DWG NO. RBW6405G11931-3G-7 | | | REV 1 |
| MAT'L PLASTIC | | UNLESS OTHERWISE SPECIFIED | |
| HEAT TREAT FINISH SPEC | | DIMENSIONS ARE IN INCHES $.XXX \pm .010$ FRACTIONS $\pm 1/8$ $.XX \pm .03$ ANGLES $\pm 1^\circ$ $.X \pm .1$ SURFACES $\pm 125/\sqrt{}$ | |
| DRAWN BY: CLOUGH | | 1. BREAK ALL SHARP EDGES $.015 \times 45^\circ$ OR $.015R$ | |
| CHECKED: DUERFELDT | | 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | |
| OPPTS APPR: ANDERSON | | 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 | |
| QA APPR: LINDSAY | | USED ON MODEL | |
| APPROVED: GILBERT | | | |
| SCALE 1:2 | DATE 8/24/2015 | SHEET 4 OF 4 | |